






LETTERING TO BE
CAST FLUSH WITH TOP
OF LID. POSITION
AS SHOWN

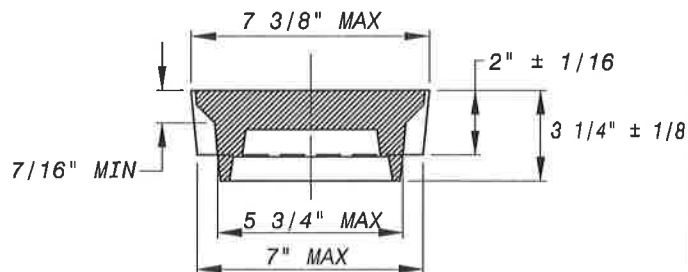

APPLICABLE STOCK NO.
4881-9002-6
4881-9003-4
4881-9005-9
4881-9001-8

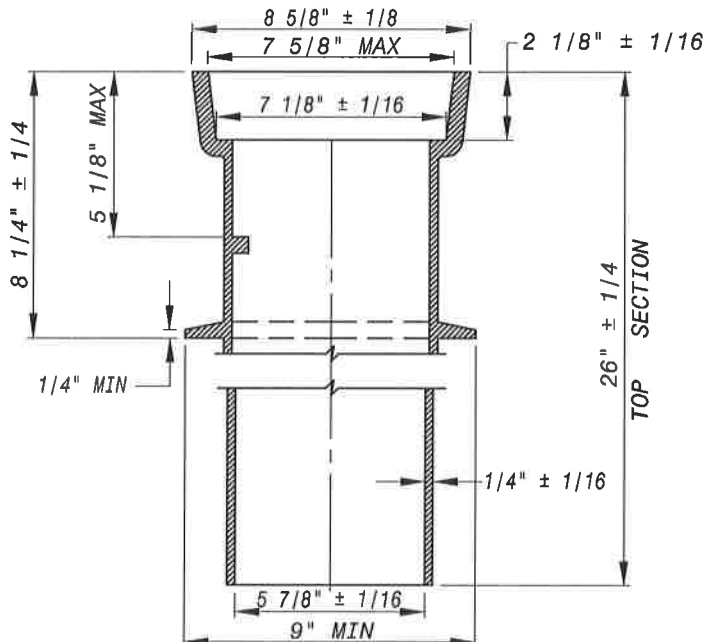

COVER

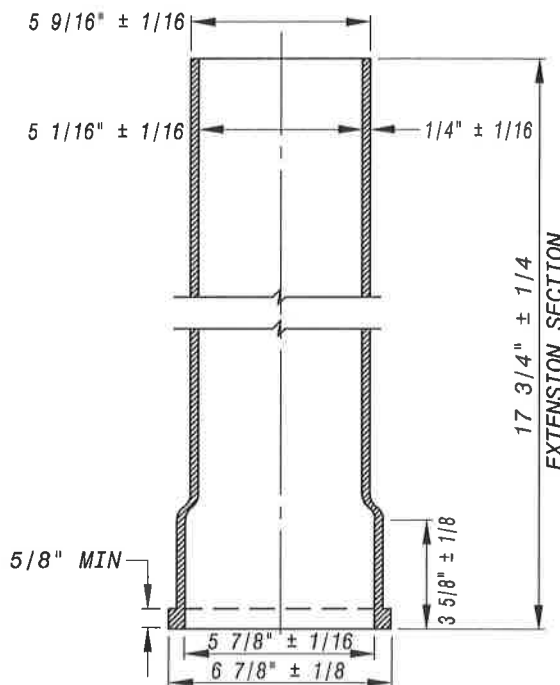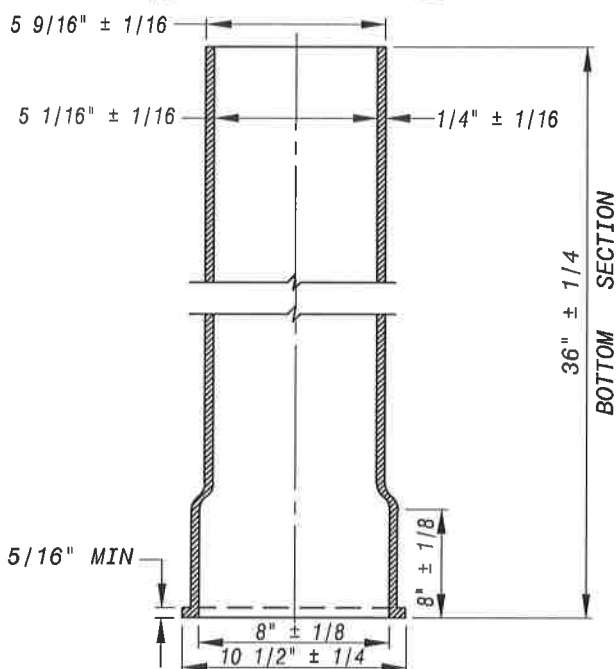

NOTE:

STOP LUG IN TOP SECTION TO BE 1/2" x 1/2" x 5/8" MIN. LUG TO BE SIZED SO AS NOT TO INTERFERE WITH OPERATION OF VALVE.
ALL CASTINGS ARE TO BE CLEANED BY AN APPROVED PROCESS AND COATED WITH AN APPROVED ASPHALTUM OR COAL TAR PAINT.

WEIGHT

COVER - 12 1/2 LBS MIN.
TOP SEC. - 37 1/2 LBS MIN.
BOTTOM SEC. - 46 LBS MIN.
EXTENSION SEC. - 17 LBS MIN.

ALL SECTIONS SHOWN TO BE
GRAY IRON CASTINGS,
ASTM.A-48 CLASS NO.25 MIN.

WASHINGTON
SUBURBAN
SANITARY
COMMISSION

REVISIONS:

APPROVED: 3/17/16

[Signature]
MATERIAL AND SERVICES GROUP LEADER

PROCUREMENT AND MANUFACTURING DETAIL

ADJUSTABLE VALVE
BOX ROUND HEAD
SLIDING TYPE

P&M
1.0